



www.tts-martin.sk

MARTIN POWER MP 275 I-3



Output ratings

Prime power - PRP	270 kVA / 216 kW
Standby power - ESP	297 kVA / 238 kW
Current	390 A
Voltage	400 V / 230 V
Frequency	50 Hz
Voltage system	TN-C

Prime power - PRP

These ratings are applicable for supplying continuous electrical power. There is no limitation to the hours of operation and this model can supply 10% overload power for 1 hour in 6 hours.

Standby power - ESP

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. Maximum 500 operating hours per year are allowed with maximum continuous work for 300 hours.

Basic information

Engine brand	FPT - IVECO
Engine model	C87 TE3F
Emission limit	stage III A
Speed	1500 min-1
Control panel current	400 A (- A)
AMF5, M1, P1 (AMF1)	
Standard fuel tank capacity	500 l

Dimensions and weights

Length (L)	3080 mm
Width (W)	1315 mm
Height (H)	1740 mm
Height with CP* (HCP)	1740 mm
Weight without CP*	2438 kg


* Control panel

Available alternators

Mecc Alte	ECO38-2L/4
Sincro	SK 250 LM
Marelli	MJB 315 SA 4
WEG	AG10 250 MI00AI



- TBD - To be defined later
- All pictures are for informational purposes only
- We reserve the right to change the specification without notice

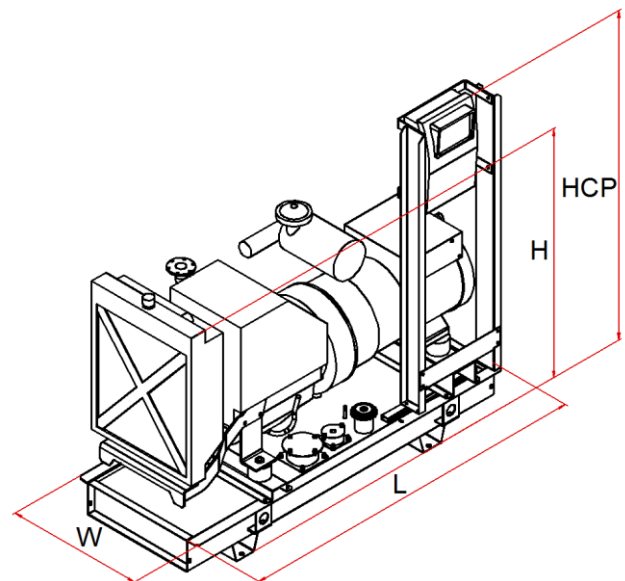

Genset details

Consumption @ 100% PRP	60 l
Consumption @ 75 % of PRP	47 l
Consumption @ 50 % of PRP	34 l
Consumption @ 25 % of PRP	20 l
Battery voltage	24 V
Battery	2 x 140 Ah

Standard scope of supply

Engine	4-stroke diesel engine
	Engine harness
	Radiator with fan
	Air filter
	Intercooler
	Turbocharger (for turbocharged)
	Charging alternator
	Oil cooler
	Oil filter
	Fuel filter
	Fuel supply pump
	Oil draining valve
	Starter
Alternator	Self regulation system
	Self excitation system
	Synchronous
	Single bearing
	Protection IP 21
	Automatic voltage regulator
	Brushless
	Flexible connection disk + housing
Base frame	Steel base frame
	Flexible antivibration mounting
	Integrated fuel tank
	Fuel level sensor
	Fuel filling cap with ventilation
Starting accumulator	
Counter flange,sealing,set of coonection material	
Initial filling of oil and coolant	
Standard factory load test	
Operation and maintenance manual	

Engine details

Prime power - PRP	232 kW
Standby power - ESP	256 kW
Intake	turbocharged with intercooler
Speed governor	electronic
Cylinders	6L
Displacement	8,7 dm ³
Air requirement for intake	20 m ³ /min
Air requirement for cooling	280 m ³ /min
Max. back-pressure at intake	5 kPa
Thermal power - cooling	135 kW
Thermal power - radiated	36 kW
Exhaust gas flow	36 m ³ /min
Max. back-pressure at exhaust	5 kPa
Max. exhaust temperature	488 °C
Performance class	G 3
Specific fuel consumption	215 g/kWh
Engine oil volume	28 l
Coolant volume	63 l

Available optionals

Control panel	MP Manual
	MP Automatic
	MP Parallel
	MP ATS
Canopy 95LWA type [LWA / dB(A)]	96 / 71 @ 7 m
Canopy 90LWA type [LWA / dB(A)]	91 / 66 @ 7 m
Container	20'
Industrial exhaust silencer -20 dB	DN 125
Residential exhaust silencer -30 dB	DN 125


Basic options

Retention bath	
Increased fuel tank	1500 l
Increased IP Protection	
Front air output for canopy	
Electronic speed governor	
Homologized chassis for road transport	
Separate storage tank	
Automatic fuel filling device (AFD)	

Many more other options available


Canopy - type 95 LWA

Side and back doors with lockers	
Side and/or back air inlet with jalousies	
Top air outlet	
Position of exhaust silencer	in the canopy
Canopy colour: top RAL 3000 / bottom RAL 9005	
Length (L)	3500 mm
Width (W)	1340 mm
Height (H)	2085 mm
Height with industr. silencer (HI)	-
Height with resid. silencer (HR)	-
Weight without control panel and exhaust silencer	3097 kg

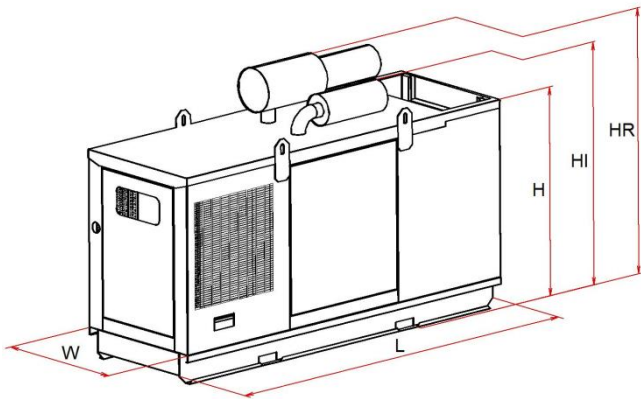

Canopy - type 90 LWA

Side and back doors with lockers	
Side and/or back air inlet with jalousies	
Top / side air outlet	
Canopy colour: top RAL 3000 / bottom RAL 9005	
Retention bath	
Exhaust silencer inside of canopy	
Length (L)	4595 mm
Width (W)	1350 mm
Height (H)	2100 mm
Weight without control panel and exhaust silencer	3449 kg

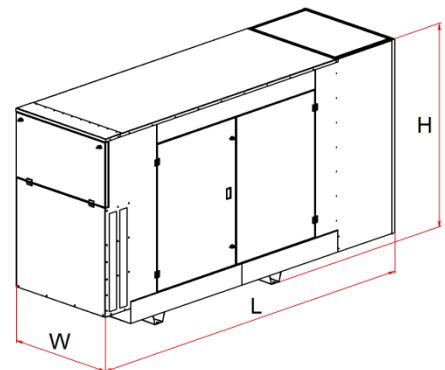

- TBD - To be defined later
- All pictures are for informational purposes only
- We reserve the right to change the specification without notice