


MARTIN POWER
MP 800 M2
BASE GENSET

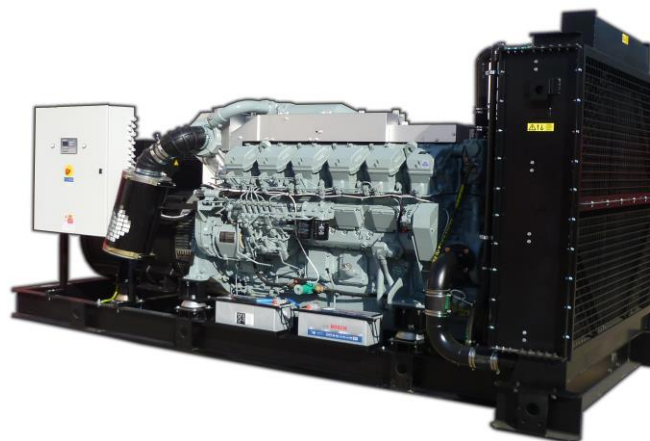

Output Ratings

Prime power - PRP	800 kVA / 640 kW
Standby power - ESP	880 kVA / 704 kW
Current	1154 A
Voltage	400 V / 230 V
Frequency	50 Hz
Voltage system	TN-C

Prime power

These ratings are applicable for supplying continuous electrical power. There is no limitation to the hours of operation and this model can supply 10% overload power for 1 hour in 6 hours

Standby power

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. In this rating max 500 hours per year is allowed with maximum continuous work for 300 hours

Basic informations

Engine brand	MTU
Engine model	12V 2000 G26F
Emmissions limit	- / TA luft
Speed	1500 min-1
Control panel current	- / 1250 A / 1250 A
AMF1 / AMF5 ,M1 ,P1 / ATS	
Standard fuel tank capacity	1200 l


Dimmensions and weights

Length (L)	TBD
Width (W)	TBD
Height (H)	TBD
Height with CP*(HCP)	TBD
Weight without CP*	TBD

* Control panel

Available alternators

Meccalte	ECO43-1S/4
Sincro	SK 400 SD
Marelli	MJB 355 MB 4
Weg	315MI40AI

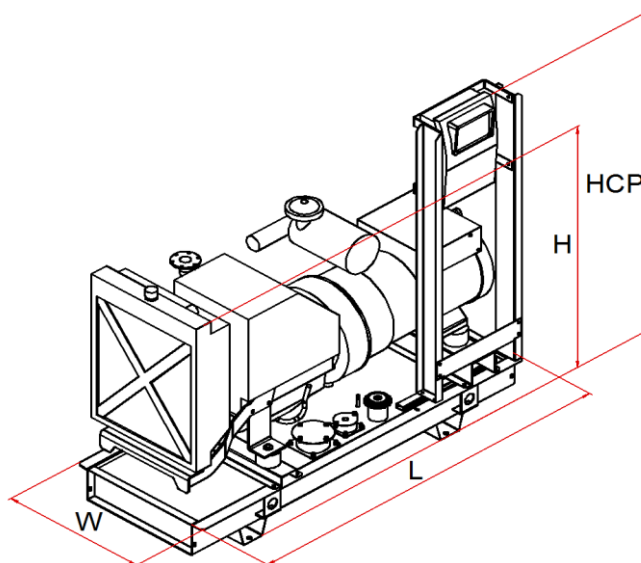

- TBD - To be defined later
- All pictures are for informational purposes only
- We reserve the right to change the specification without notice

Genset details

Consumption at PRP	151 l
Consumption at 75 % of PRP	115 l
Consumption at 50 % of PRP	81 l
Consumption at 25 % of PRP	44 l
Battery voltage	24 V
Battery	2 x 170 Ah

Standard scope of supply

Engine
4 stroke diesel engine
Engine harness
Radiator with fan
Air filter
Intercooler
Turbocharger (for turbocharged engines)
Charging alternator
Oil cooler
Oil filter
Fuel filter
Fuel supply pump
Oil draining valve
Starter
Alternator
Self regulation system
Self excitation system
Synchronous
Single bearing
Protection IP 21
Automatic voltage regulator
Brushless
Flexible connection disk + housing
Base frame
Steel base frame
Flexible antivibration mounting
Integrated fuel tank
Fuel level sensor
Fuel filling cap with ventilation
Starting accumulator
Counter flange, sealing, set of connection material
Initial filling of oil and coolant
Standard factory load test
Operation and maintenance manual

Engine details

Prime power - PRP	677 kW
Standby power - ESP	748 kW
Intake	turbocharged with intercooler
Speed governor	electronic
Cylinders	12V
Displacement	26,76 dm ³
Air requirements for intake	47,4 m ³ /min
Air requirements for cooling	969 m ³ /min
Max. back pressure at intake	4 kPa
Thermic power - cooling	410 kW
Thermic power - irradiated	73 kW
Exhaust gas flow	132 m ³ /min
Max. back pressure at exhaust	5 kPa
Max. exhaust temperature	540°C
Performance class	G 3
Specific fuel consumption	190 g/kWh
Engine oil volume	92 l
Coolant volume	TBD

Available additions

Control panel	MP Manual MP Automatic MP Parallel MP ATS
Canopy	95 LWA (70dB/7m) 90 LWA (65dB/7m)
Container	TBD
Industrial exhaust silencer -20 dB	2 x DN 150
Residential exhaust silencer -30dB	DN 200

Basic options

Retention bath	
Increased fuel tank	3000 l
Increased IP Protection	
Front air output for canopy	
Electronic speed governor	
Homologized chassis for road transport	
Separate storage tank	
Automatic fuel filling device (AFD)	

Lot more options available

Canopy - 95 LWA (70 dB at 7 m)

Side and back doors with lockers

Side and/or back air inlet with jalousies

Top air outlet

Possition of exhaust silencer	TBD
-------------------------------	-----

Red (RAL3000) + Black (RAL9005) color of canopy

Length (L)	TBD
------------	-----



Width (W)	TBD
-----------	-----

Height (H)	TBD
------------	-----

Height with industr. silencer (HI)	TBD
------------------------------------	-----

Height with resid. silencer(HR)	TBD
---------------------------------	-----

Weight without control panel and exhaust silencer	TBD
---	-----

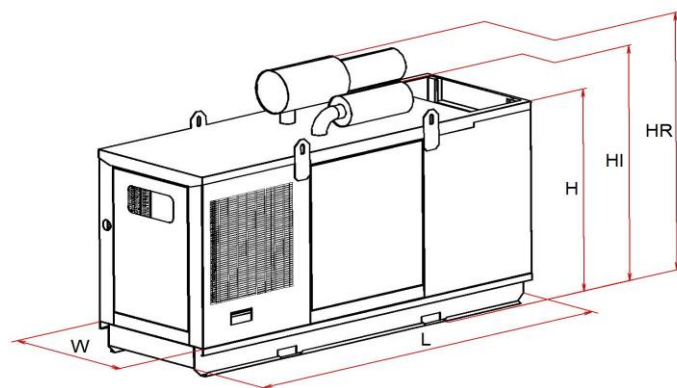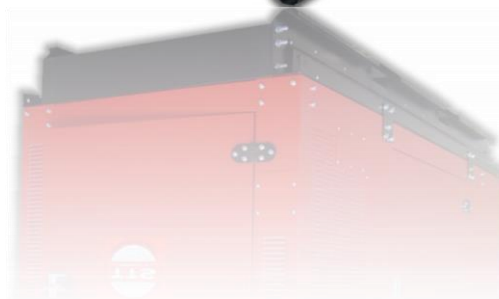

Canopy - 90 LWA (65 dB at 7 m)

Side and back doors with lockers

Side and/or back air inlet with jalousies

Top / side air outlet

Red (RAL3000) + Black (RAL9005) color of canopy

Retention bath



Exhaust silencer inside of canopy

Length (L)	TBD
------------	-----

Width (W)	TBD
-----------	-----

Height (H)	TBD
------------	-----

Weight without control panel and exhaust silencer	TBD
---	-----

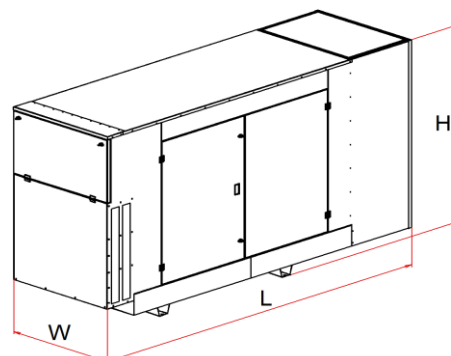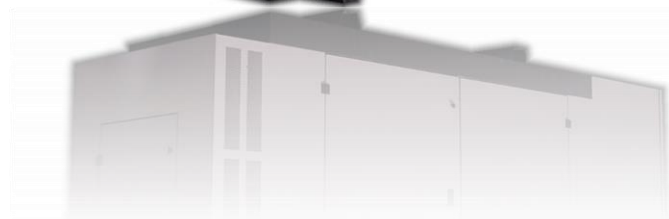

- TBD - To be defined later
- All pictures are for informational purposes only
- We reserve the right to change the specification without notice